




Owner's Manual

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power Supply

Please connect the designated AC adapter to an AC outlet of the correct voltage. Please be sure to use only an AC adapter which supplies 9V DC,  center negative. Please do not use an AC adapter which supplies more than 9V DC. Unplug the AC power adapter when not in use or during electrical storms.

Connections

Always turn off the power and all other equipment before connecting or disconnecting. This will help prevent malfunction and damage to any of the devices. Make sure to unplug all connection cables and power cords before moving this unit. To avoid deformation, discoloration, or other serious damage,

- do not expose this unit to the following conditions:
- *Direct sunlight
 - *Heat sources
 - *Magnetic fields
 - *Extreme temperature or humidity
 - *Excessively dusty or dirty location
 - *High humidity or moisture
 - *Strong vibration or shock

Interference with other electrical devices and Cleaning

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions. Clean only with a soft, dry cloth.

Handling

Do not apply excessive force to the switches or controls. Do not let paper, metal, or other objects into this unit. Take care not to drop the unit, and do not subject it to shock or excessive pressure.

FCC certification

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

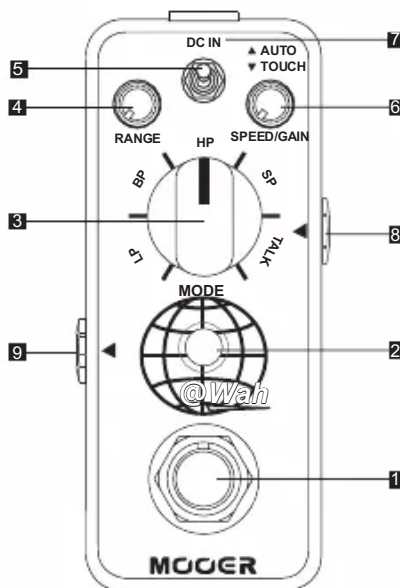
- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

Main Features


- 5 different Wah filter modes
- Two methods of operation : Auto (time based) and Touch (dynamic response)
- Versatile controls
- Full metal case

- Truebypass switching
- 9V power supply


Pedal layout



- 1. True bypass footswitch:** Engages and disengages the effect.
- 2. On/Off Led:** Shows the on/off status of the pedal. When the Led is lit the effect is engaged.
- 3. MODE control:** Selects the filter mode and simultaneously adjusts the MIX and ATTACK of the filter. The 5 filter modes are listed below:
 LP (Low pass)
 BP (bandpass)
 HP (high pass)
 SP (Standard)
 TALK (vocals)
- 4. RANGE:** Adjusts the tonality of the filter
- 5. Operation method switch:** 'AUTO' is a time based filter. 'Touch' responds to the dynamics of the instrument.
- 6. SPEED / GAIN:** Adjusts the rate of the 'AUTO' wah or the input response of the 'TOUCH' wah.

- 7. DC in power jack:** Input for power supply , use a 9V DC regulated power supply.
- 8. Input jack :** 1/4" audio jack for connecting to the input device or instrument.
- 9. Output jack :** 1/4" audio jack, effect output for connection to amp or other devices.

Specification

Modes : 5 digital auto filters with 2 methods of operation.
Input : 1/4" mono audio jack. (Impedance: 470k Ohms)
Output : 1/4" mono audio jack (Impedance: 100 Ohms)
Power requirements: AC adapter 9V DC , center negative. Highly recommend to use Moer Micro Power.
Current Draw: 120mA
Dimensions : 93.5mm(D) x 42mm(W) x 52mm(H)
Weight : 140g
Accessories : Owner's Manual

**Notes : Any specification's update will not be amended in this manual.*